


KX-NSX2000 KX-NSX1000

Superior flexibility for changing work styles.




KX-NSX2000 KX-NSX1000

Companies require opportunities to make their operations more efficient. The business communication system needs to be flexible, innovative and competitive, while reducing operating costs and other expenses.

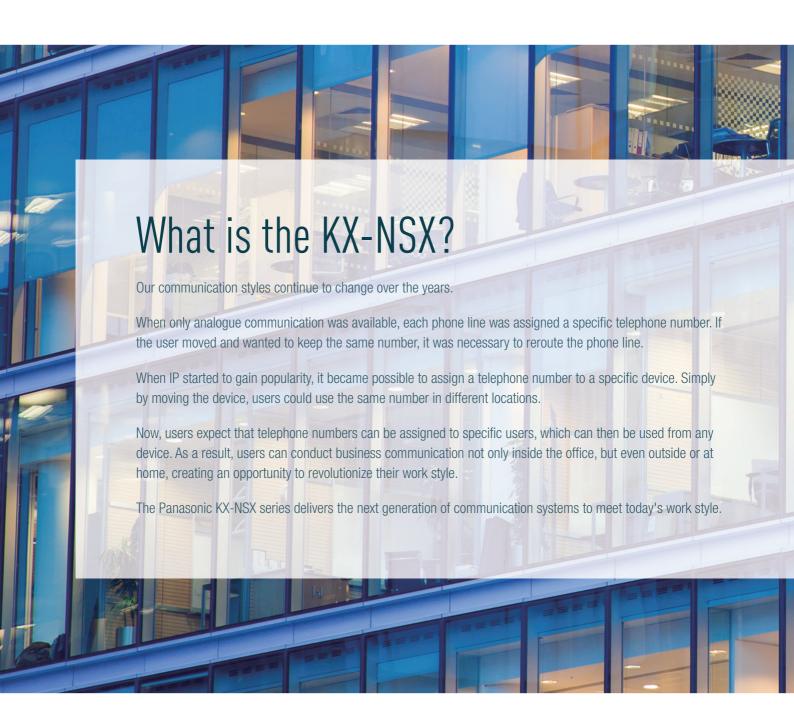



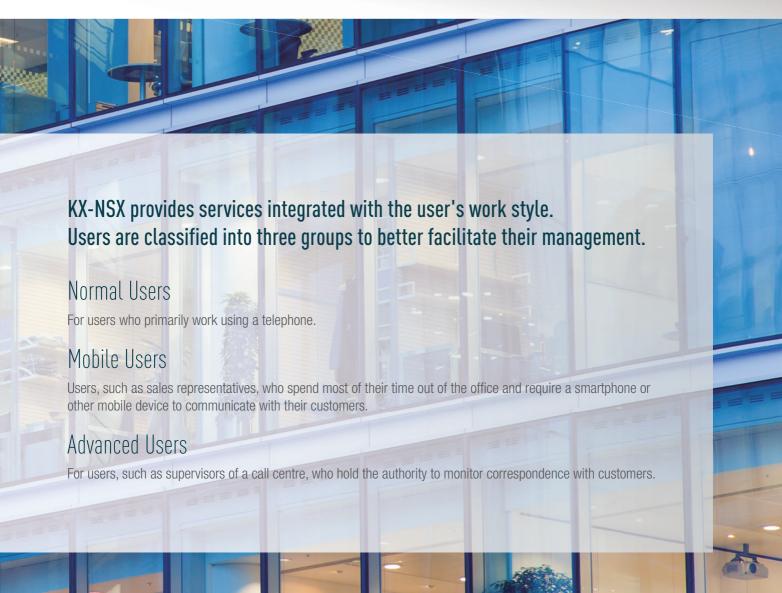



User Concept

Multi-Devices

Each user can assign a phone number to multiple devices such as their office phone and mobile phone, which enables a phone or mobile phone to be easily used as an office extension. Users can easily manage multiple devices spread over various locations using a single number.

Smart Desk

This function enables a number of users to share the same extension. Users apply their own profile with a service-in operation so they can only receive their personal calls and voicemail, etc. Once they have serviced-out, it becomes available for another employee. When an employee services in at a location, they are automatically serviced out at any previous location.

My Portal

Using the My Portal web-based user interface, each user can easily operate the telephony function settings and Unified Message customisation without knowing the PBX-specific feature number.




Scalability

Multi-Connection System

The KX-NSX is ideal for any company with scalability. Supports up to 2,000 users and provides connectability for up to 32 sites with the KX-NS series for seamless communication. It can also save costs for making calls between offices with KX-NS networking as internal calls, and provides sharing of up to 128 tenants, unified messaging, an office directory, and much more.

Centralised Management

The KX-NSX enables companies spread out over multiple locations to perform remote management from a main site using IP networking. There is no need to have an administrator at every site, which enables low cost operations.

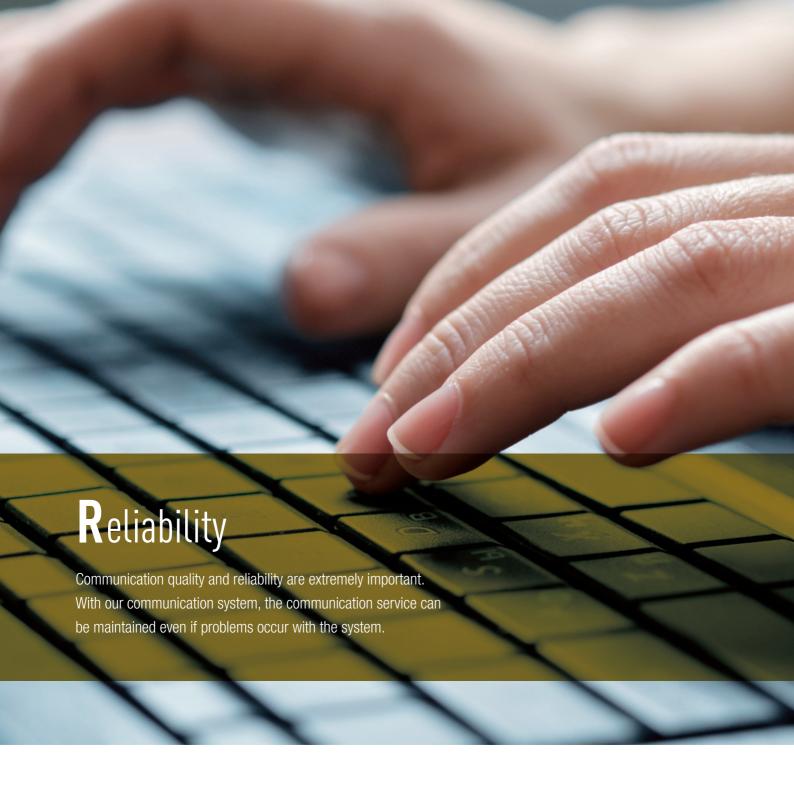

Reliable Backup System to Survive System Failures

1+1 Redundancy


With a primary unit and secondary unit installed, if a problem occurs with the working system on the primary unit, the backup system of the secondary unit is promoted to the working system and continues operations as KX-NSX master PBX.

Simplified Isolated Mode

If network trouble occurs with a multisite connection, the KX-NS at each site can operate as a stand-alone system. The KX-NSX is resilient and enables communication to continue.

Remote Maintenance

A service engineer can remotely perform maintenance on the KX-NSX. The Panasonic cloud service enables the engineer to access your system securely, from anywhere, anytime - which allows for quick system recovery. KX-NSX maintenance is both flexible and efficient.

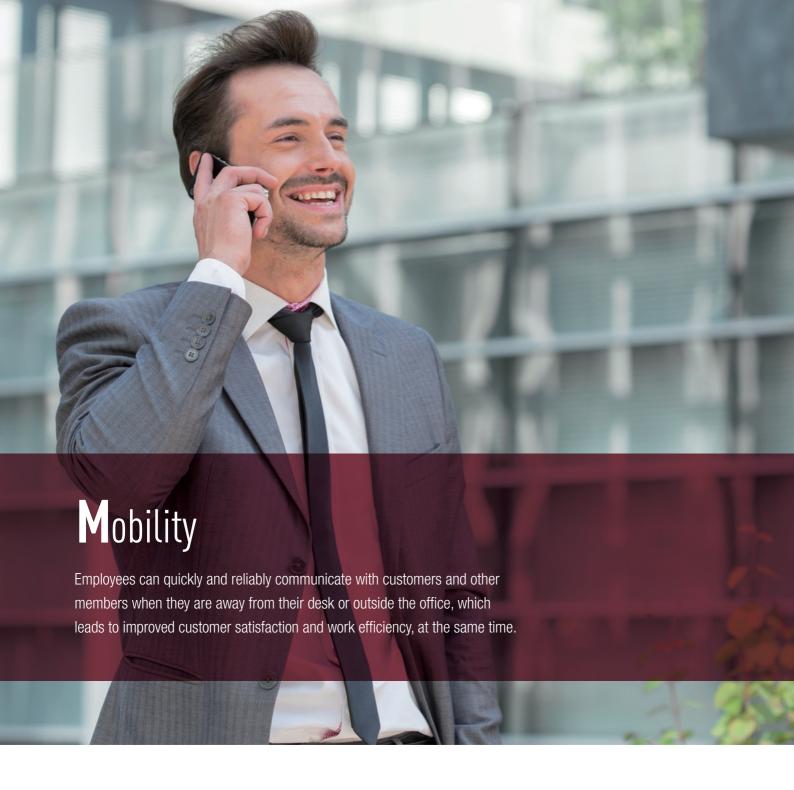


DECT Wireless System

With a multi-zone wireless system, you can receive calls wherever you are on your premises. This reduces waiting times and enables customers to speak to the right person at the right time. You can also switch easily between desk phones and portable devices during conversations. Finally, DECT paging allows conversations to be shared among multiple participants.

Mobile Phone Integration

Mobile phones can be connected as office extensions and used with the same number as the office phone for easy management and customer contact. With UC Pro, presence management, text chat, and video call functions can be used to enhance your business work style.

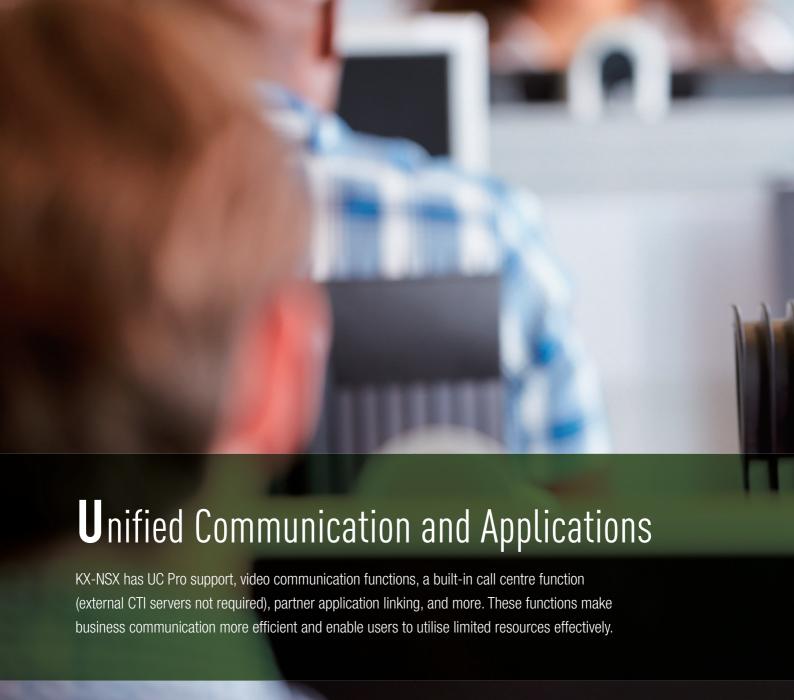

Panasonic UC Pro

UC Pro supports multiple devices such as PCs and mobile phones and provides collaborative functions, including presence management, audio/text/video chat, and synchronization with Outlook Calendar.

Mobile clients can communicate with an account that

Mobile clients can communicate with an account that is also registered to their PC, so they can take care of business while out of the office.

Video Communication

The combination of the video IP phone KX-HDV430 and communication IP camera KX-NTV150 or IP video doorphone KX-NTV160 enable easy video communication.



Built-in Call Centre

Automatic Voice Guidance

By being notified of their position in a queue through voice guidance, callers can better decide whether to wait, leave a message, or hang up. This provides a favourable impression for your business and improves the satisfaction of the customers for the service they are receiving.

Monitoring Callers and Call History Report

The supervisor can monitor the live status of call centres to understand onsite problems and improve them. Call history can also be output as a report to understand problems or opportunities relating to customer service. Report data can be saved to an external server.

Auto Recording and Backing Up Data

The KX-NSX can be used to automatically record conversations with customers, which can be listened to by supervisors, saved to an external server, and used to understand problems or opportunities relating to customer service.

Standard Users

Standard users who often use PC's need to streamline work activities and communicate more efficiently. With the KX-NSX with UC Pro, they can control communications from the screen of their PC and use IM and presence management to quickly reach co-workers. They can also easily contact people when moving around the office by using a DECT wireless system.



Remote Users


Remote users who mainly use telecommunication, such as home office users, need to use their extension numbers at home. With the KX-NSX, they can use a software phone and Panasonic IP Proprietary Telephones as remote extensions.

What kind of communication fits with your company?

The type of communication in the workplace varies for each and every person. Panasonic provides an appropriate solution for each of these different user types.

Reception/ Operators

Receptionists and operators that receive customer queries need to streamline call handling with easy operations such as point-and-click call controls, and see who's calling and why. With the KX-NSX and proprietary telephone, they can check the status of members, easily route calls, and cover multiple offices.

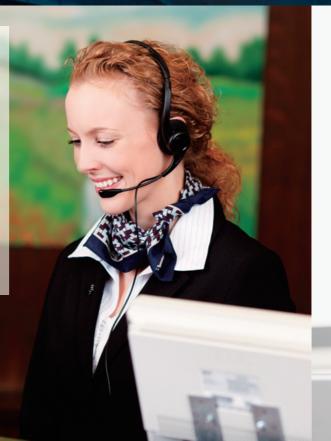

Executives/ Supervisors

Executives and supervisors need to control the office communications of all users using extensions, mobile phones or PCs. With the KX-NSX with UC Pro, they can perform UM, video calls, and one number management, etc.





IP Proprietary Telephone/DECT Portable Station

The KX-NT500 series of fully functional IP telephones is designed for various businesses that require advanced communication.

A wide range of DECT handsets are also available to meet your business needs.

IP Proprietary Telephone

KX-NT560

- 4.4 inch Backlight LCD Display
- 4 x 8 Self Labelling, Flexible CO Buttons
- 2 Ethernet Port (1000 Base-T)
- Power-over-Ethernet (PoE)
- Full Duplex Speakerphone
- Built-in Bluetooth for Headset
- EHS support
- Eco Mode
- Available in Black and White

KX-NT556/KX-NT553 with KX-NT505

- 6-Line (KX-NT556) or 3-Line (KX-NT553) Backlight LCD Display
- 12 x 3 (KX-NT556) or 12 x 2 (KX-NT553) Self-Labelling, Flexible CO Buttons
- 2 Ethernet Port (1000 Base-T)
- Power-over-Ethernet (PoE)
- Full Duplex Speakerphone
- EHS support
- Eco Mode
- Available in Black and White
- Options: KX-NT505 (Add-on 48-Key Module)



Photo: KX-NT556 with KX-NT505

KX-NT551

- 1-Line Backlight LCD Display
- 8 Flexible CO Buttons
- 2 Ethernet Port (1000 Base-T)
- Full Duplex Speakerphone
- Power-over-Ethernet (PoE)
- Eco Mode
- Available in Black and White



KX-NT511A/KX-NT511P

- 1-Line LCD Display
- 3 Flexible CO Buttons
- Power-over-Ethernet (PoE) (KX-NT511P only)
- 2 Ethernet Port (100 Base-TX)
- AC Adaptor Included (KX-NT511A only)
- Full Duplex Speakerphone
- Eco Mode
- · Available in Black and White





DECT Portable Station

Tough Model

KX-TCA385

- IP65*1 Compliant Dust Protection and Splash Resistance
- 1.8 inch Colour LCD
- 12 Flexible Keys
- Noise Reduction
- DECT Paging
- Vibration
- Built-in Bluetooth

Dimensions (W x D x H) (mm): 55.0 x 23.0 x 151.5 Weight: 150 g (Belt clip is included)



Slim & Light Model

KX-TCA285

- 12 Flexible Keys
- 1.8 inch Colour LCD
- Noise Reduction
- DECT Paging
- Vibration
- Built-in Bluetooth

Dimensions (W x D x H) (mm): 48.5 x 17.9 x 127.5 Weight: 88 g



Standard Model

KX-TCA185

- 12 Flexible Keys
- 1.8 inch Colour LCD
- Noise Reduction
- DECT Paging
- Vibration

Dimensions (W x D x H) (mm): 48.2 x 25.4 x 146.3 Weight: 115 g



^{*} Dimensions and weight values do not include the charger.

^{*1} IP65 compliant: Protection against dust entering the handset, and protection against water spraying from any direction.

IP Phone

KX-HDV430 (Planned launch in 2016)

- Video Communication
- 4.3 inch Backlight LCD Display
- Colour Touch Panel
- 3 x 8 Self Labelling, Programmable Buttons
- 2 Ethernet Port (1000 Base-T)
- Power-over-Ethernet (PoE)
- Full Duplex Speakerphone
- Built-in Bluetooth for Headset
- EHS support
- Available in Black and White



KX-HDV330

- 4.3 inch Backlight LCD Display
- Colour Touch Panel
- 3 x 8 Self Labelling, Programmable Buttons
- 2 Ethernet Port (1000 Base-T)
- Power-over-Ethernet (PoE)
- Full Duplex Speakerphone
- Built-in Bluetooth for Headset
- EHS support
- Available in Black and White



KX-HDV230

- 2.3 inch Backlight LCD Display
- 5.1 inch Self Labelling Backlight LCD Display
- 2 x 12 Self Labelling, Programmable Buttons
- 2 Ethernet Port (1000 Base-T)
- Power-over-Ethernet (PoE)
- Full Duplex Speakerphone
- EHS support
- Available in Black and White



KX-HDV130

- 2.3 inch Backlight LCD Display
- 2 Programmable Buttons
- 2 Ethernet Port (100 Base-TX)
- Power-over-Ethernet (PoE)
- Full Duplex Speakerphone
- Available in Black and White



KX-HDV100

- 2.3 inch LCD Display
- 2 Programmable Buttons
- 1 Ethernet Port (100 Base-TX)
- AC Adaptor Included
- Available in Black and White



IP Camera

Communication IP Camera

KX-NTV150

- Video Communication
- Dedicated Camera for the KX-NSX/KX-NS series
- Built-in Wi-Fi
- Power-over-Ethernet (PoE)/ AC Adaptor
- One Touch Calls
- Auto Dialling with Sensor



IP Video Doorphone

KX-NTV160

- Video Communication
- Dedicated Camera for the KX-NSX/KX-NS series
- IP43 Support
- Power-over-Ethernet (PoE) only
- One Touch Calls
- Auto Dialling with Sensor





IP Phone/IP Camera (SIP)

The KX-HDV series of IP phones offer streamlined functions and high definition voice quality, and the KX-HDV430 can be linked to a KX-NTV series IP camera to directly view a video feed from the IP camera.

Trademarks and registered trademarks

- Microsoft®, Windows®, and Outlook® are registered trademarks of Microsoft Corporation in the U.S. and other countries.

 The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Panasonic Corporation is under licence.

 Wi-Fi is a trademark or registered trademark of Wi-Fi Alliance.
- Apple, the Apple logo, iPad, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.
- Google Play and the Google Play logo are registered trademarks or trademarks of Google, Inc.
 Other trademarks and trade names are those of their respective owners.

- Safety Precaution: carefully read the operating instructions and installation manual before using these products.

- Please contact your nearest Panasonic sales company orPanasonic dealer for the necessary information on things such as Activation Keys.
- Some models and applications are available in limited countries.
 The images shown of products display and lamps are composite
- images.

 Weights and dimensions are approximate.
- Design and specification subject to change without notice.
 These products may be subject to export control regulations.

DISTRIBUTED BY:

NOMAD - TELEINFORMATYKA

81-392 Gdynia, ul. Słowackiego 52 tel.: 58-660-9999, @: nomad@nomad.com.pl

www.nomad.com.pl, www.kx-nsx2000.pl

Panasonic